Module

WWW.DELOCK.COM

DATA SHEET

MiniPCIe I/O PCIe full size
1 x serial RS-232, 1 x parallel

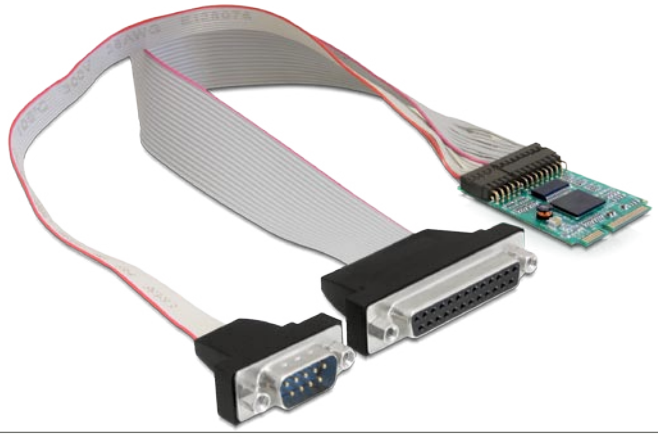

Description

This miniPCIe adapter by Delock expands your system by one serial and one parallel interface, which you may lead out. You can connect different serial and parallel devices like printer, scanner, modem etc. to this adapter.

Ref.	95138
EAN	4043619951383
Country of origin	Taiwan
Customs tariff number	84733020

Images

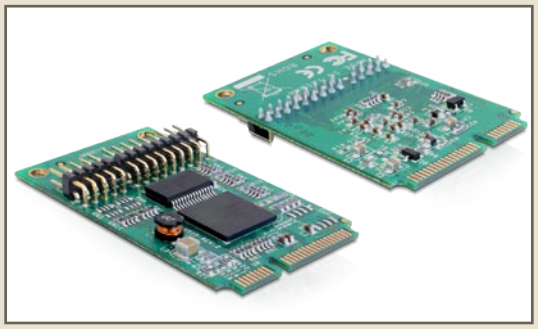

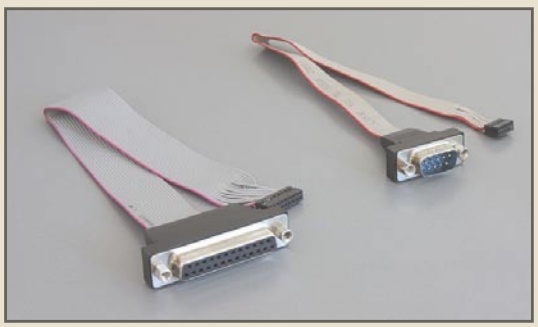

Specification

- Chipset: Oxford OXPCIe952
- Form factor: miniPCIe full size
- Interface: PCI Express Revision 1.1a
- Connector:
  - PCB: 1 x 9 pin COM port pin header
  - 1 x 18 pin parallel port pin header
  - cable: 1 x serial RS-232 DB9 male with screw nuts
  - 1 x parallel DB25 female with screw nuts
- Data transfer rate up to 460 Kb/s
- Compatible with 16950 UART
- FIFO: 128 byte
- Mode: serial: RS-232
  parallel: SPP/EPP/ECP - IEEE1284
- Cable length with connector: serial ca. 30 cm
  parallel ca. 28 cm
- Operating temperature: 0 °C ~ 85 °C
- Storage temperature: -20 °C ~ 85 °C

System requirements
- Windows XP/Vista/7/7-64
- Mainboard with a free miniPCIe slot with a PCIe interface

Package content
- MiniPCIe module
- 1 serial connecting cable, 1 parallel connecting cable
- Driver CD, user manual

Package
- Blister

© 2011 by Delock. All names and symbols mentioned here are property of the respective producer.
Printing errors, changes and errors excepted.